



### Injection Quill with Quick Release Coupling


RATED TO 150 PSI.

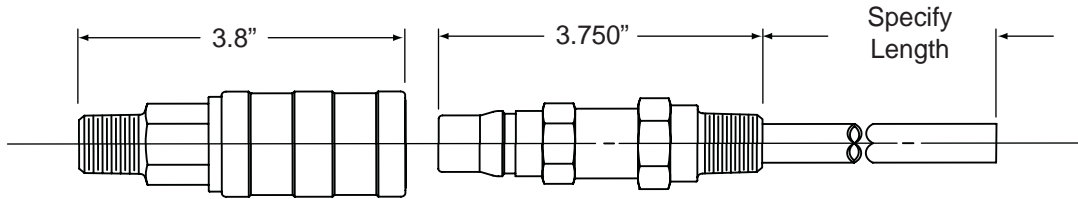


#### Installation View

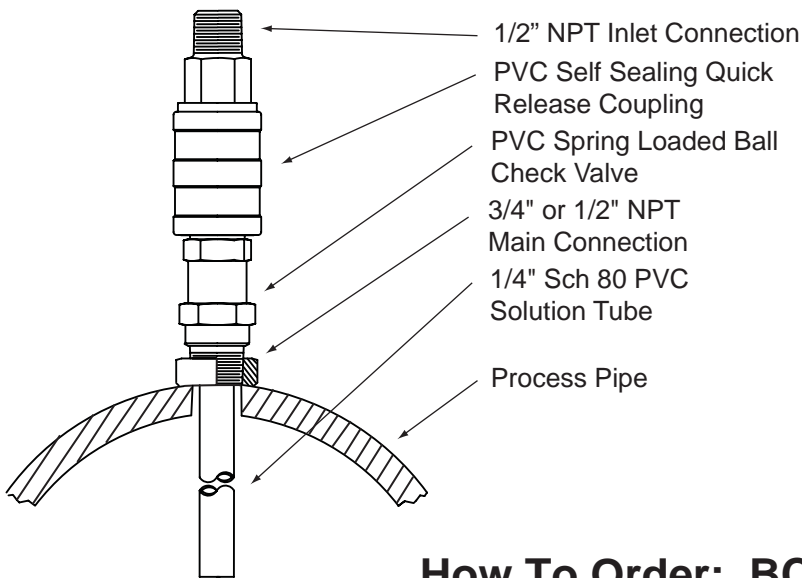

#### Optional PVDF Tube Fitting

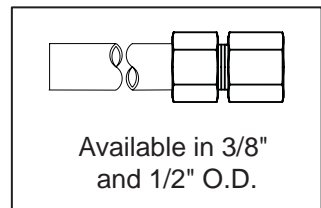

#### Optional Tip Configuration



### How To Order: **BCK - 75 - V - 6 - 4 - P - H**

MODEL TYPE	MAIN CONNECTION	"O" RING MATERIAL	INLET CONNECTION	SOL. TUBE LENGTH	MATERIAL	SPRINGS
BCK = Injection Quill w/ Quick Disconnect	75 = 3/4" NPT 50 = 1/2" NPT	V = Viton E = EPDM	5 = 1/2" NPT 6 = 1/2" O.D. TC 7 = 3/8" O.D. TC	2" 4" 6" 8"	P = PVC	H = Hastelloy C S = Stainless Steel

\*\* Only available with BCK-75. Add a "C" before the o-ring material. Ex. BCK-75-CV-5-6-P-H