


EB-109

Non-Retractable Sampling Probe
150psi/1500psi Rated




SS Configuration

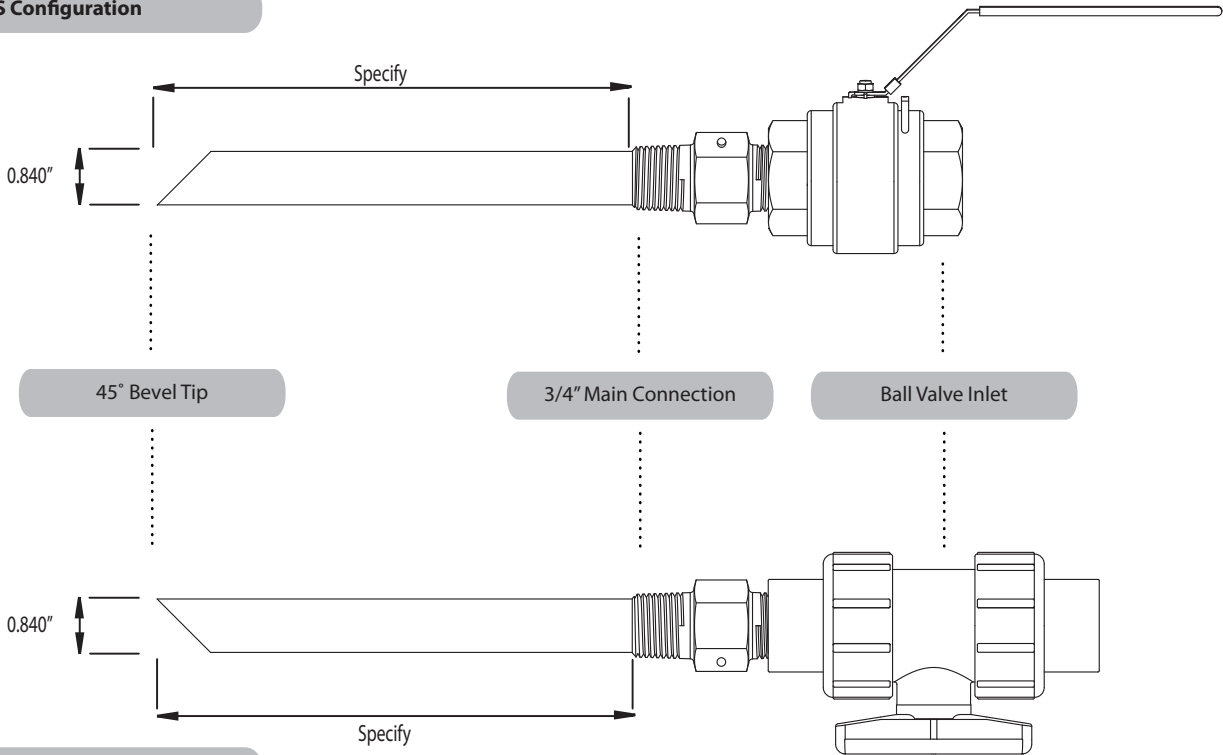

PVC Configuration

Ordering Information

Sample Part Number: EB-109-S-6-B

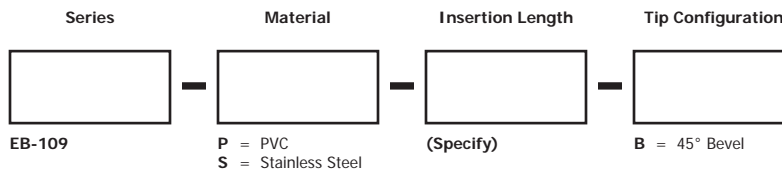

Note: PVC models have a maximum warranted insertion length of 6 inches. Consult factory for lengths greater than 6 inches.

Technical Notes

1. 1/2" PVC Solution Tubes are Schedule 80 pipe with an O.D. of 0.840 inches and an average I.D. of 0.526 inches.
2. 1/2" Alloy Solution Tubes are Schedule 40 pipe with an O.D. of 0.840 inches and an average I.D. of 0.602 inches.
3. Saf-T-Flo does not recommend nor warranty PVC/CPVC Solution Tubes where velocities in the process main exceed 6 fps.
4. PVC models are rated to 150psi. Alloy models are rated to 1500psi.