



EB-110

Non-Retractable Injector 150psi/1500psi Rated

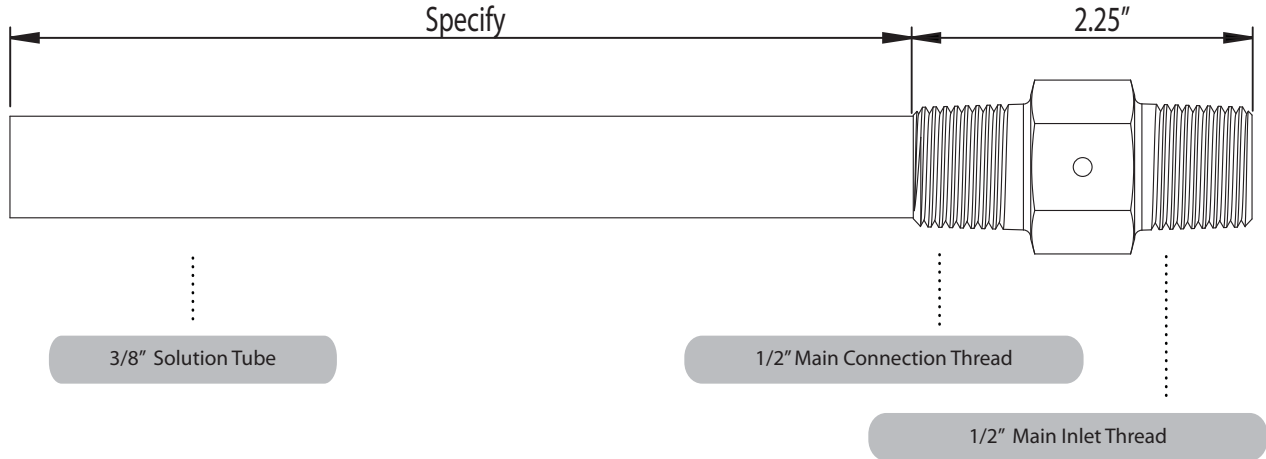

Ordering Information

Sample Part Number: EB-110-P-6-0

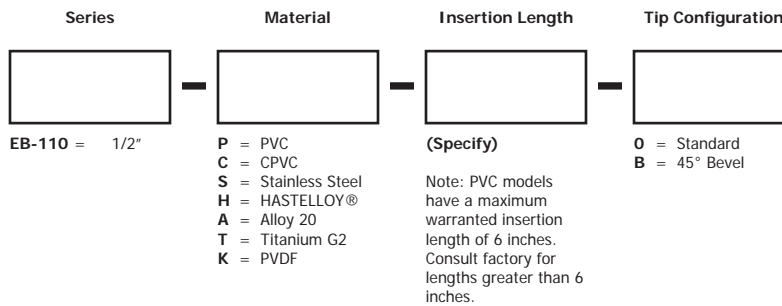

Technical Notes

1. 3/8" PVC, CPVC, and PVDF Solution Tubes are Schedule 80 pipe with an O.D. of 0.675 inches and an average I.D. of 0.403 inches.
2. 3/8" Alloy Solution Tubes are Schedule 40 pipe with an O.D. of 0.675 inches and an average I.D. of 0.473 inches.
3. Saf-T-Flo does not recommend nor warranty PVC/CPVC Solution Tubes where velocities in the process main exceed 6 fps.
4. PVC, CPVC and PVDF models are rated to 150psi. Alloy models are rated to 1500psi.