



EB-111

Non-Retractable Injector 150psi/1500psi Rated

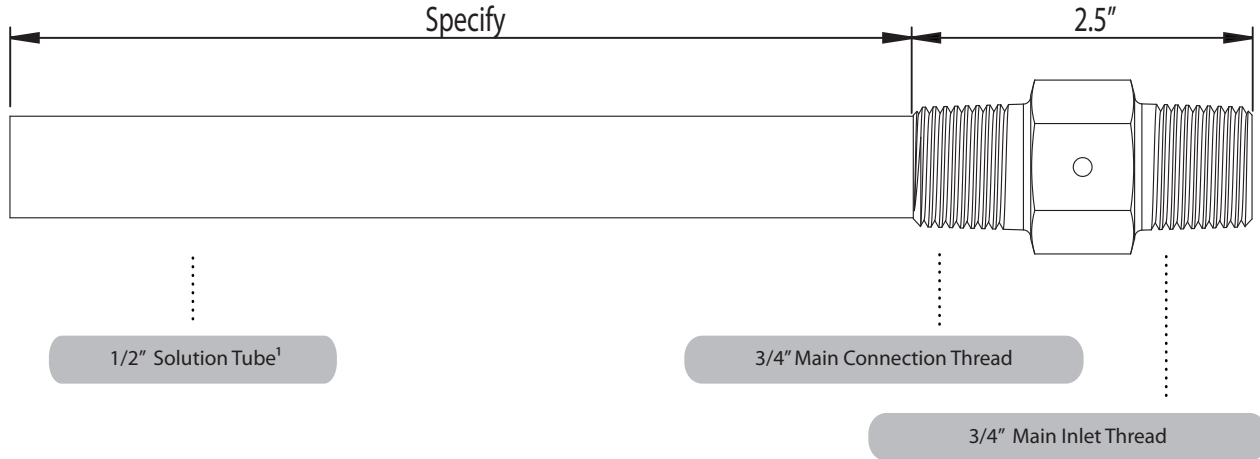

Ordering Information

Sample Part Number: EB-111-P-6-0

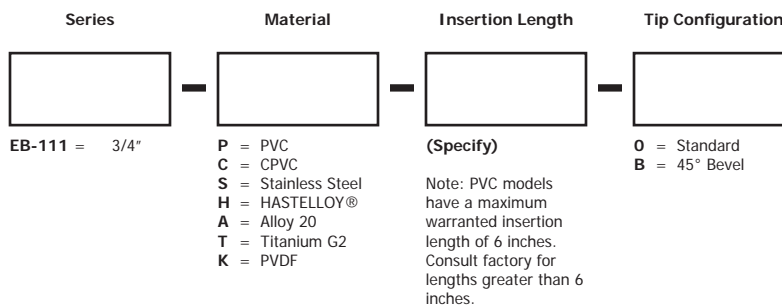

Technical Notes

- 1/2" PVC, CPVC, and PVDF Solution Tubes are Schedule 80 pipe with an O.D. of 0.840 inches and an average I.D. of 0.526 inches.
- 1/2" Alloy Solution Tubes are Schedule 40 pipe with an O.D. of 0.840 inches and an average I.D. of 0.602 inches.
- Saf-T-Flo does not recommend nor warranty PVC/CPVC Solution Tubes where velocities in the process main exceed 6 fps.
- PVC, CPVC and PVDF models are rated to 150psi. Alloy models are rated to 1500psi.