



# EB-113

## Non-Retractable Injector 150psi/1500psi Rated

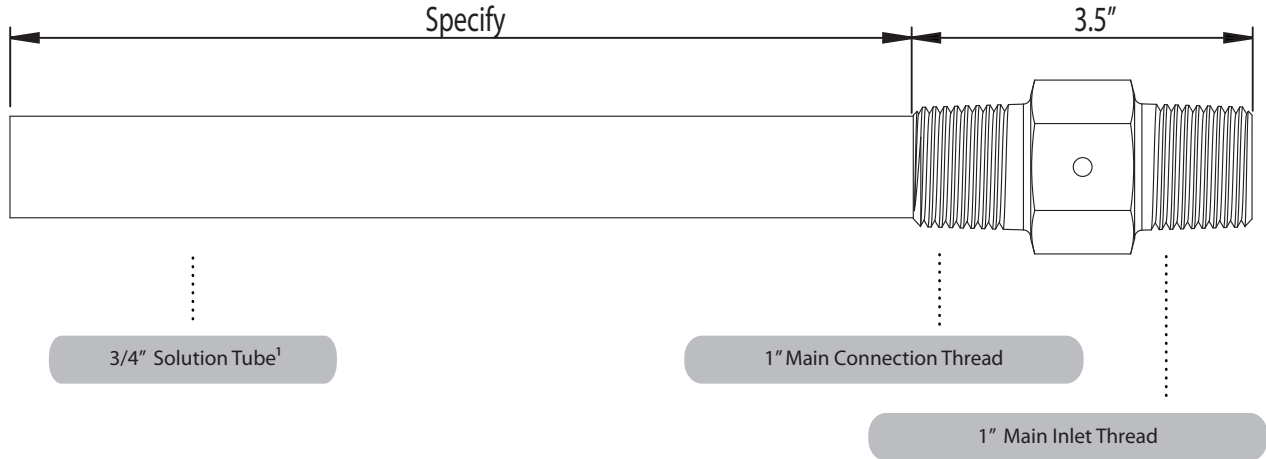

### Ordering Information

**Sample Part Number: EB-113-P-6-0**

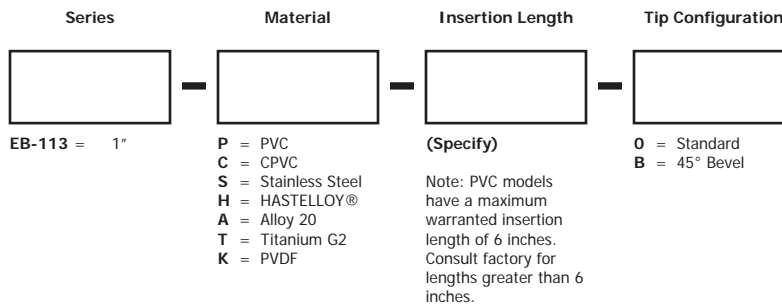

### Technical Notes

- 3/4" PVC, CPVC, and PVDF Solution Tubes are Schedule 80 pipe with an O.D. of 1.050 inches and an average I.D. of 0.722 inches.
- 3/4" Alloy Solution Tubes are Schedule 40 pipe with an O.D. of 1.050 inches and an average I.D. of 0.804 inches.
- Saf-T-Flo does not recommend nor warranty PVC/CPVC Solution Tubes where velocities in the process main exceed 6 fps.
- PVC, CPVC and PVDF models are rated to 150psi. Alloy models are rated to 1500psi.