



EB-165 Series

All CPVC - Retractable Injector 150psi Rated
1-1/2" Main Connection x 1" Solution Tube

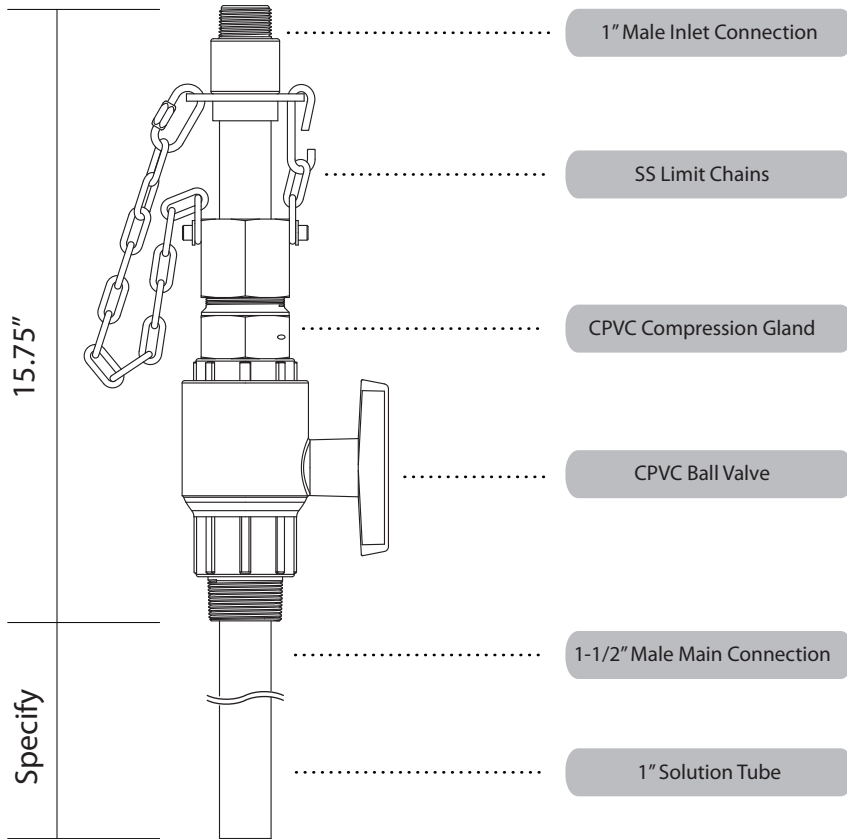


Flexible Hose Assemblies



Check Valve Options

FNPT or Socket Inlet Connection



Threaded

Ordering Information

Sample Part Number: EB-165-C-P-(Specify)-0

Series	Valve/Compression Material	Solution Tube Material	Insertion Length	Tip Configuration	Optional Check Valve	Flexible Hose Assembly
EB-165	C = CPVC	P = PVC C = CPVC	(Specify) <small>Note: PVC, CPVC, models have a maximum warranted insertion length of 10 inches. Consult factory for lengths greater than 10 inches.</small>	O = Standard B = 45° Bevel DH = Diffuser Holes	00 = No Check Valve 01 = PVC/Viton 02 = PVC/EPDM 03 = CPVC/Viton 04 = CPVC/EPDM <small>Note: Check Valve will be same material as solution tube.</small>	See Flexible Hose Assembly Product Page For Ordering Options. <small>(Pressure ratings for flexible hose assemblies may differ from rating of the injector)</small>

Technical Notes

- PVC and CPVC Solution Tubes are Schedule 80 pipe with an O.D. of 1.315 inches and an average I.D. of 0.936 inches.
- Saf-T-Flo does not recommend nor warranty PVC/CPVC Solution Tubes where velocities in the process main exceed 6 fps.
- Main Connection and Inlet Connection are NPT by default. BSP thread options are available. Consult factory for details.