



EB-191 Series

Retractable Injector 150psi Rated


1-1/4" Main Connection x 3/4" Solution Tube

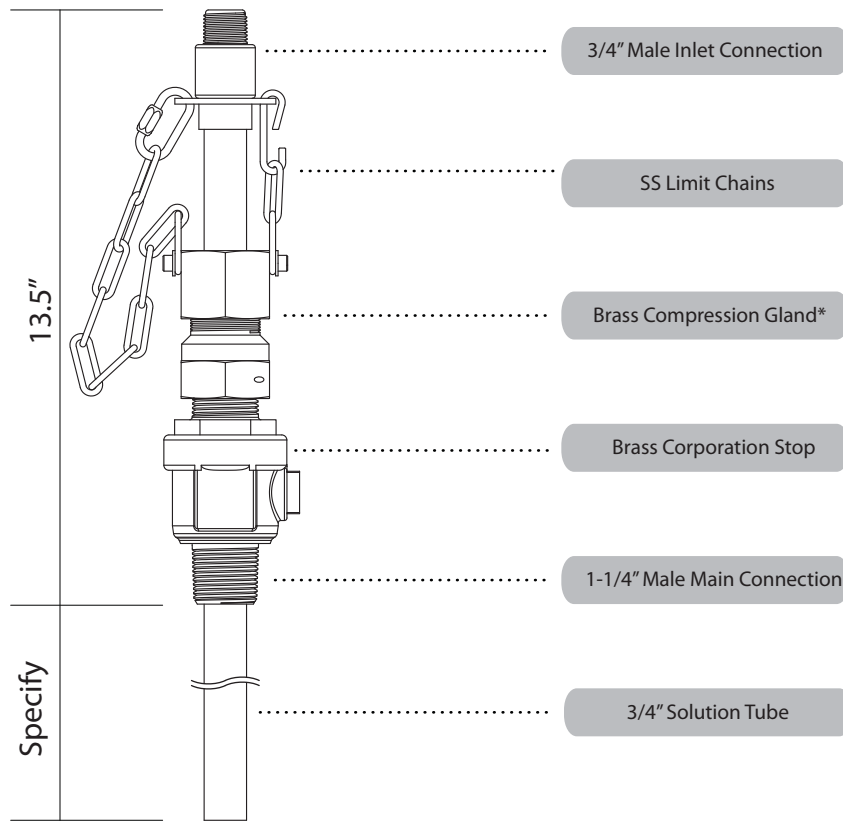


Flexible Hose Assemblies



Optional Check Valve



Alloy



PVC/CPVC

Ordering Information

Sample Part Number: EB-191-B-P-(Specify)-0

Series	Valve/Compression Material	Solution Tube Material	Insertion Length	Tip Configuration	Optional Check Valve	Flexible Hose Assembly
EB-191	B = Brass	P = PVC C = CPVC S = Stainless Steel H = HASTELLOY® C-276 A = Alloy20 T = Titanium G2	(Specify) Note: PVC, CPVC, models have a maximum warranted insertion length of 8 inches. Consult factory for lengths greater than 8 inches.	O = Standard B = 45° Bevel DH = Diffuser Holes	00 = No Check Valve 01 = PVC/Viton 02 = PVC/EPDM 03 = CPVC/Viton 04 = CPVC/EPDM 05 = Alloy Note: Check Valve will be same material as solution tube.	See Flexible Hose Assembly Product Page For Ordering Options. (Pressure ratings for flexible hose assemblies may differ from rating of the injector)

CA and VT compliant NO-LEAD brass main connections are available. Indicate "-NL" at the end of the model number.

Technical Notes

- PVC and CPVC Solution Tubes are Schedule 80 pipe with an O.D. of 1.050 inches and an average I.D. of 0.722 inches.
- Alloy Solution Tubes are Schedule 40 pipe with an O.D. of 1.050 inches and an average I.D. of 0.722 inches. Schedule 80 Alloy Solution Tubes are available upon request - consult factory for details.
- Saf-T-Flo does not recommend nor warranty PVC/CPVC Solution Tubes where velocities in the process main exceed 6 fps.
- Main Connection and Inlet Connection are NPT by default. AWWA and BSP thread options are available. Consult Factory for details.

HASTELLOY® is a registered trademark of Haynes International, Inc.