



# IQ-50

Non-Retractable Injector 150psi/1500psi Rated  
With Check Valve

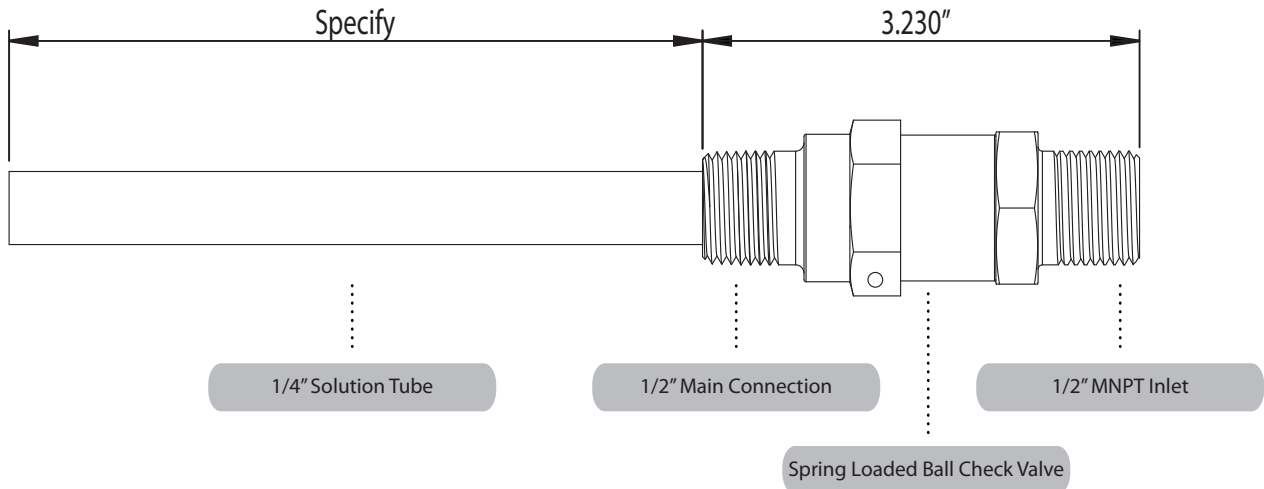

## Ordering Information

**Sample Part Number: IQ-50-V-5-6-P-H**

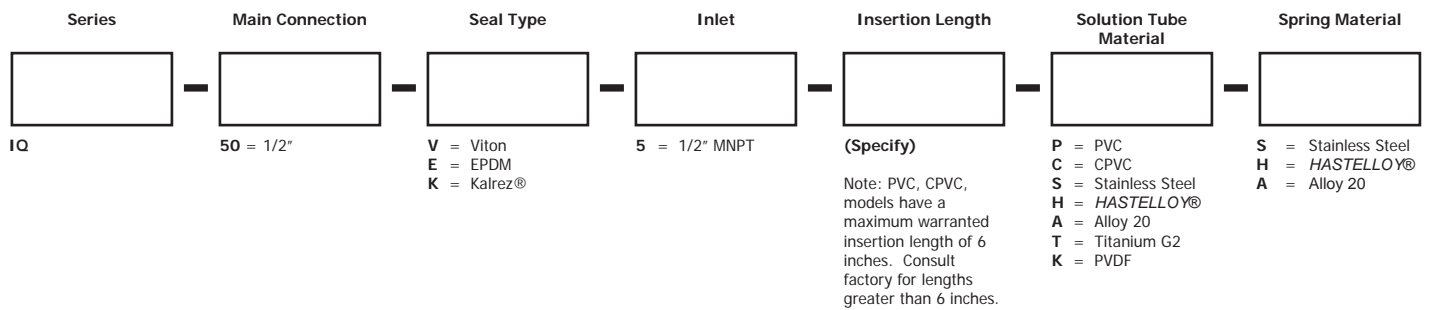

## Technical Notes

1. PVC and CPVC Solution Tubes are Schedule 80 pipe with an O.D. of 0.675 inches and an average I.D. of 0.403 inches.
2. Alloy Solution Tubes are Schedule 40 pipe with an O.D. of 0.540 inches and an average I.D. of 0.344 inches.
3. Saf-T-Flo does not recommend nor warranty PVC/CPVC Solution Tubes where velocities in the process main exceed 6 fps.
4. PVC/CPVC models are rated to 150psi. Alloy models are rated to 1500 psi.

HASTELLOY® is a registered trademark of Haynes International, Inc.  
Kalrez® is a registered trademark of Dupont Performance Elastomers L.L.C.