



IQ Series

Non-Retractable Injectors 150psi/1500psi Rated
With Check Valve

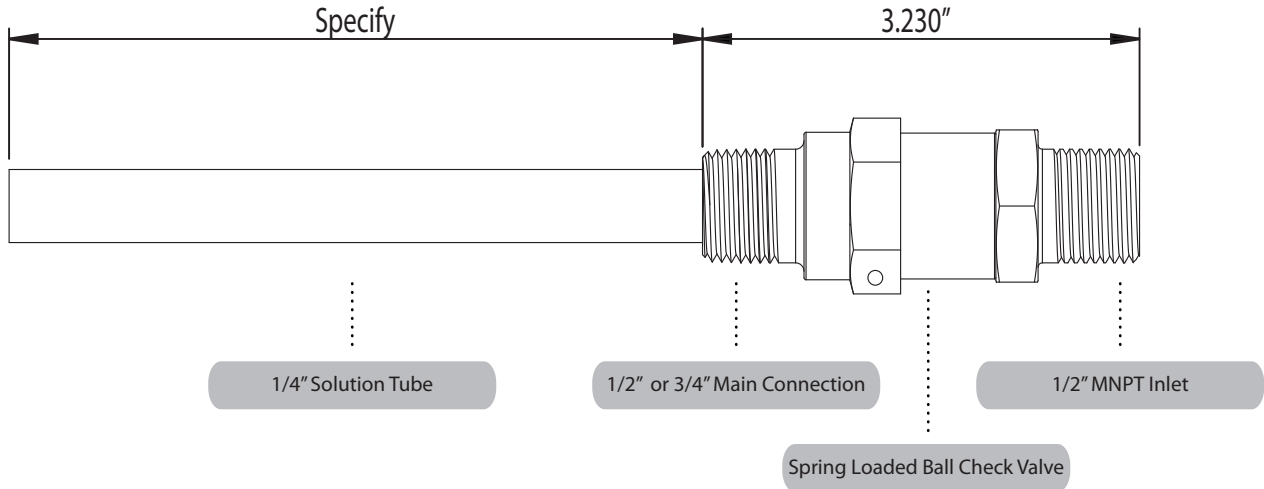

Ordering Information

Sample Part Number: IQ-50-V-5-6-P-H

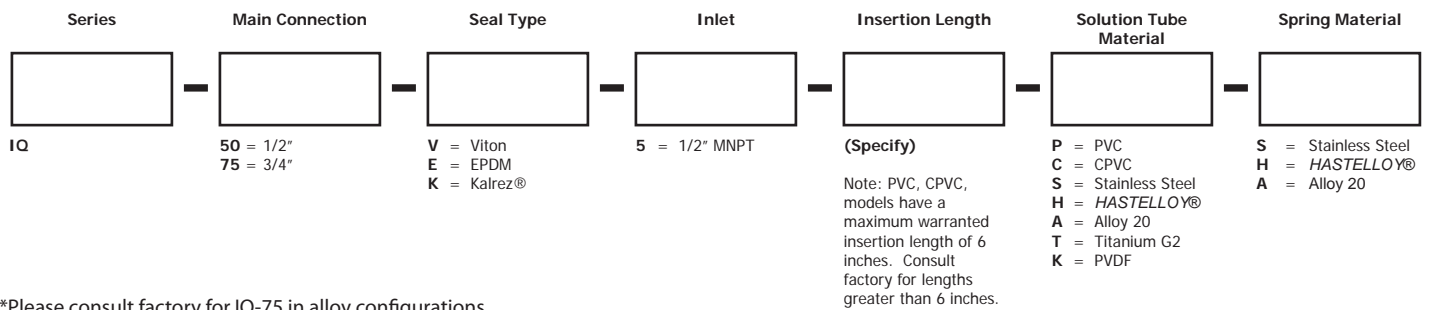

*Please consult factory for IQ-75 in alloy configurations

Technical Notes

1. PVC and CPVC Solution Tubes are Schedule 80 pipe with an O.D. of 0.540 inches and an average I.D. of 0.282 inches.
2. Alloy Solution Tubes are Schedule 40 pipe with an O.D. of 0.540 inches and an average I.D. of 0.344 inches.
3. Saf-T-Flo does not recommend nor warranty PVC/CPVC Solution Tubes where velocities in the process main exceed 6 fps.
4. PVC/CPVC models are rated to 150psi. Alloy models are rated to 1500 psi.

HASTELLOY® is a registered trademark of Haynes International, Inc.
Kalrez® is a registered trademark of Dupont Performance Elastomers L.L.C.