



# SP-100

Retractable Sampling Probes 150psi Rated  
1" Ball Valve x 1/2" Sampling Probe

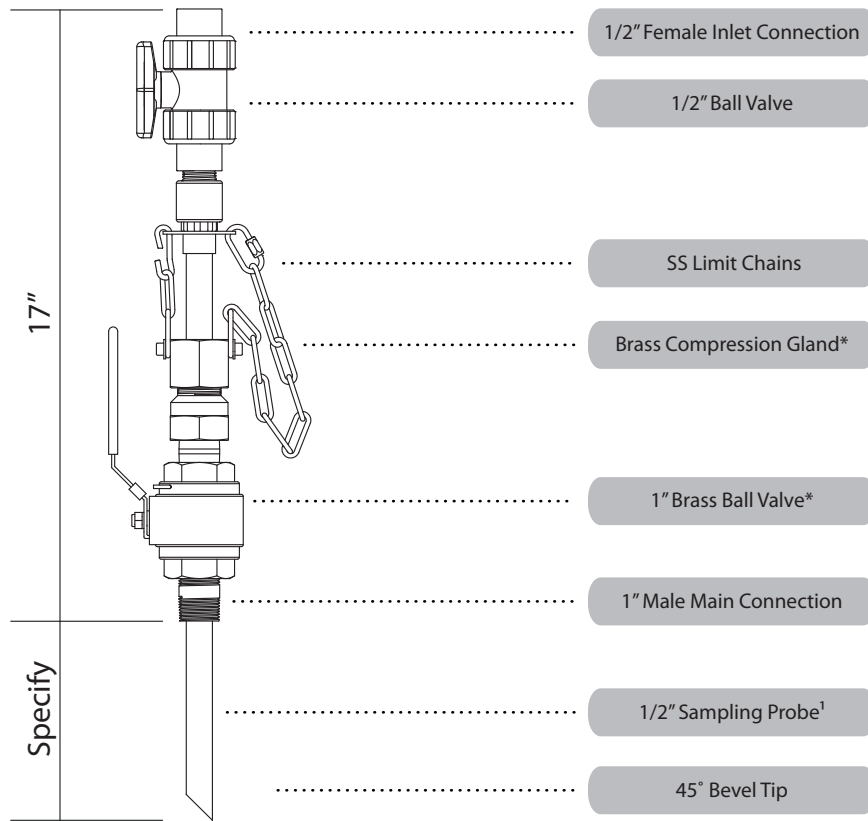

## Flexible Hose Assemblies



\* Brass Valve/Compression Shown, Stainless Steel also available, see ordering options below.

## Ordering Information

**Sample Part Number: SP-100-B-P-(specify)-B-E**

Series	Valve/Compression Material	Sampling Probe Material	Insertion Length	Tip Configuration	Ball Valve Seal Type	Flexible Hose Assembly
SP-100	B = Brass S = Stainless Steel	P = PVC S = Stainless Steel	(Specify)  Note: PVC models have a maximum warranted insertion length of 6 inches. Consult factory for lengths greater than 6 inches.	B = 45° Bevel	V = Viton E = EPDM	See <a href="#">Flexible Hose Assembly Product Page</a> For Ordering Options.  (Pressure ratings for flexible hose assemblies may differ from rating of the injector)

## Technical Notes

- 1/2" PVC Solution Tubes are Schedule 80 pipe with an O.D. of 0.840 inches and an average I.D. of 0.526 inches.
- 1/2" Alloy Solution Tubes are Schedule 40 pipe with an O.D. of 0.840 inches and an average I.D. of 0.602 inches. Schedule 80 Alloy Solution Tubes are available upon request - consult factory for details.
- No-Lead Brass is not available on Retractable Sampling Probes, select Stainless Steel instead as alternate.
- Main Connection and Inlet Connection are NPT by default. BSP thread options are available. Consult factory for details.
- Inlet Ball Valve will be same material as sampling probe.