

# EB-168


## Heavy Service Retractable Injection Quill

3/4" Valve x 3/8" Tube with Check Valve



### SPECIFICATIONS

SAFETY RATING  
250 PSI  
CHECK VALVE  
INTEGRATED SPRING LOADED  
BALL CHECK VALVE  
SAF-T-SEAL TIP  
OPTIONAL  
QUICK DISCONNECT  
N/A  
VALVE/PROCESS CONNECTION SIZE  
3/4"  
INLET CONNECTION SIZE  
1/2"  
SOLUTION TUBE SIZE  
3/8"  
SOLUTION TUBE ID (W/SAF-T-SEAL)  
0.423"  
SOLUTION TUBE ID (W/O SAF-T-SEAL)  
0.493"  
SOLUTION TUBE OD  
0.675"  
(A) OPERATING LENGTH  
11.75"  
(B) VALVE/GLAND LENGTH  
7.5"  
EXTRACTION LENGTH  
19.25" + INSERTION LENGTH

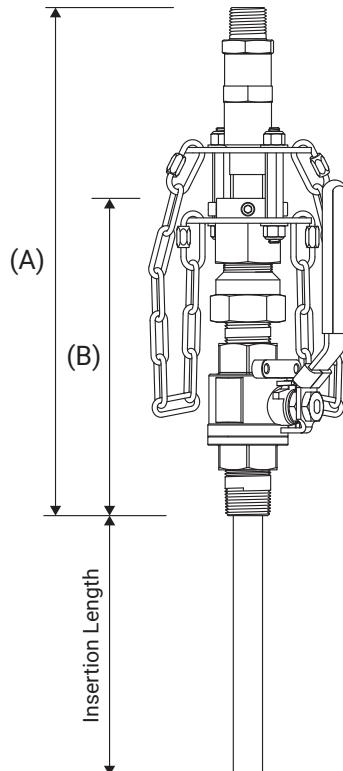

### ORDERING INFORMATION

SERIES	VALVE MATERIAL	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION	CHECK VALVE SEAL
EB-168	-	-	-	-	-
	<small>S = Stainless Steel</small>	<small>H = Alloy C276</small> <small>S = 316SS</small> <small>A = Alloy 20</small> <small>T = Titanium Gr.2</small>	<small>2 = 2"</small> <small>4 = 4"</small> <small>6 = 6"</small> <small>8 = 8"</small> <small>10 = 10"</small> <small>12 = 12"</small> <small>18 = 18"</small> <small>24 = 24"</small>	<small>0 = Standard</small> <small>B = 45° Bevel</small> <small>CV = SAF-T-Seal, FKM</small> <small>CE = SAF-T-Seal, EPDM</small>	<small>V = FKM</small> <small>E = EPDM</small> <small>K = KALREZ 6375</small>

### TECH NOTES

1. Check valve spring cracking pressure is 10 PSI.
2. SAF-T-Seal tip not available with Titanium solution tube material.